

MINI

IP67 SILICONE NEON FLEX

For Interior & Exterior Applications



description

Features

- IP67 Silicone Flexible LED Neon Flex
- For Interior & Exterior Applications
- High colour consistency and smooth illumination with no visible dots
- Viewing angle: 110°
- 1 Side Illumination
- Continuous Length up to 5 metres by powering one end
- Continuous Length up to 10 metres by powering two end
- Minimum Bending diameter: 60mm
- Cuttable increments: 50mm White

Colour Temperature

- 2700K – V Warm White
- 3000K – Warm White
- 4000K – Neutral White
- RGB - Red Green Blue

Installation

- ALC - Aluminium U-Clip
- TRU - Aluminium U-channel

Voltage

- 24VDC



technical information

Lamp Module	
LED Type	2835
Wattage / Metre	10 watts
Colour Temp	3000K
Luminous Flux	600 lm
IP Rating	IP67

* Unless otherwise stated, the tolerance of light is +/-0.3mm.

ordering information


FITTING	COLOUR TEMP	CABLE OPTIONS	DIMMING
MINI	27K V Warm White (2700K) 30K Warm White (3000K) 40K Neutral White (4000K) RGB Red, Green, Blue	END End Feed BTM Bottom Feed SIDEA Side Feed SIDEB Side Feed	ND Non Dimmable DIM 1-10V Dimmable DMX Dmx Dimmable DALI Dali Dimmable

Specifications and Dimensions subject to change without notice

Consult your representative for additional options and finishes


MINI

IP67 SILICONE NEON FLEX
For Interior & Exterior Applications



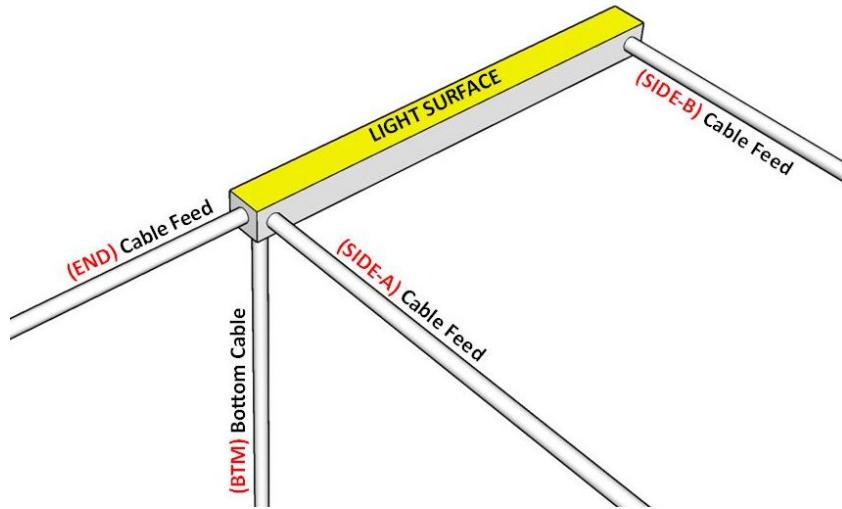


Cable Feed Options

- END End Cable Feed
- BTM Bottom Cable Feed
- SIDE A Side A Cable Feed
- SIDE B Side B Cable Feed

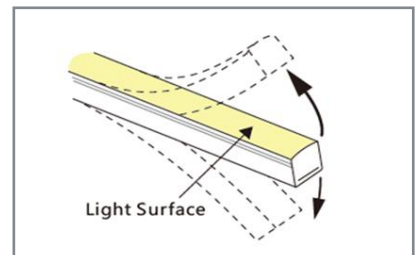


Mounting Accessories

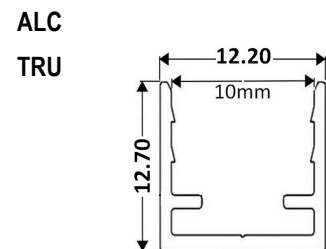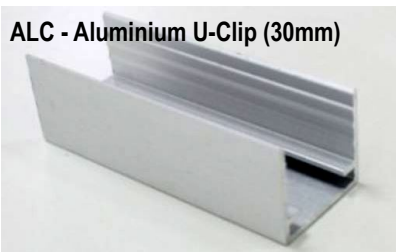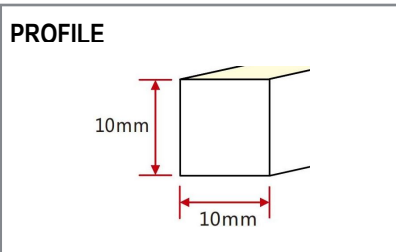

APPLICATIONS

VUELITE - SILICONE NEON FLEX

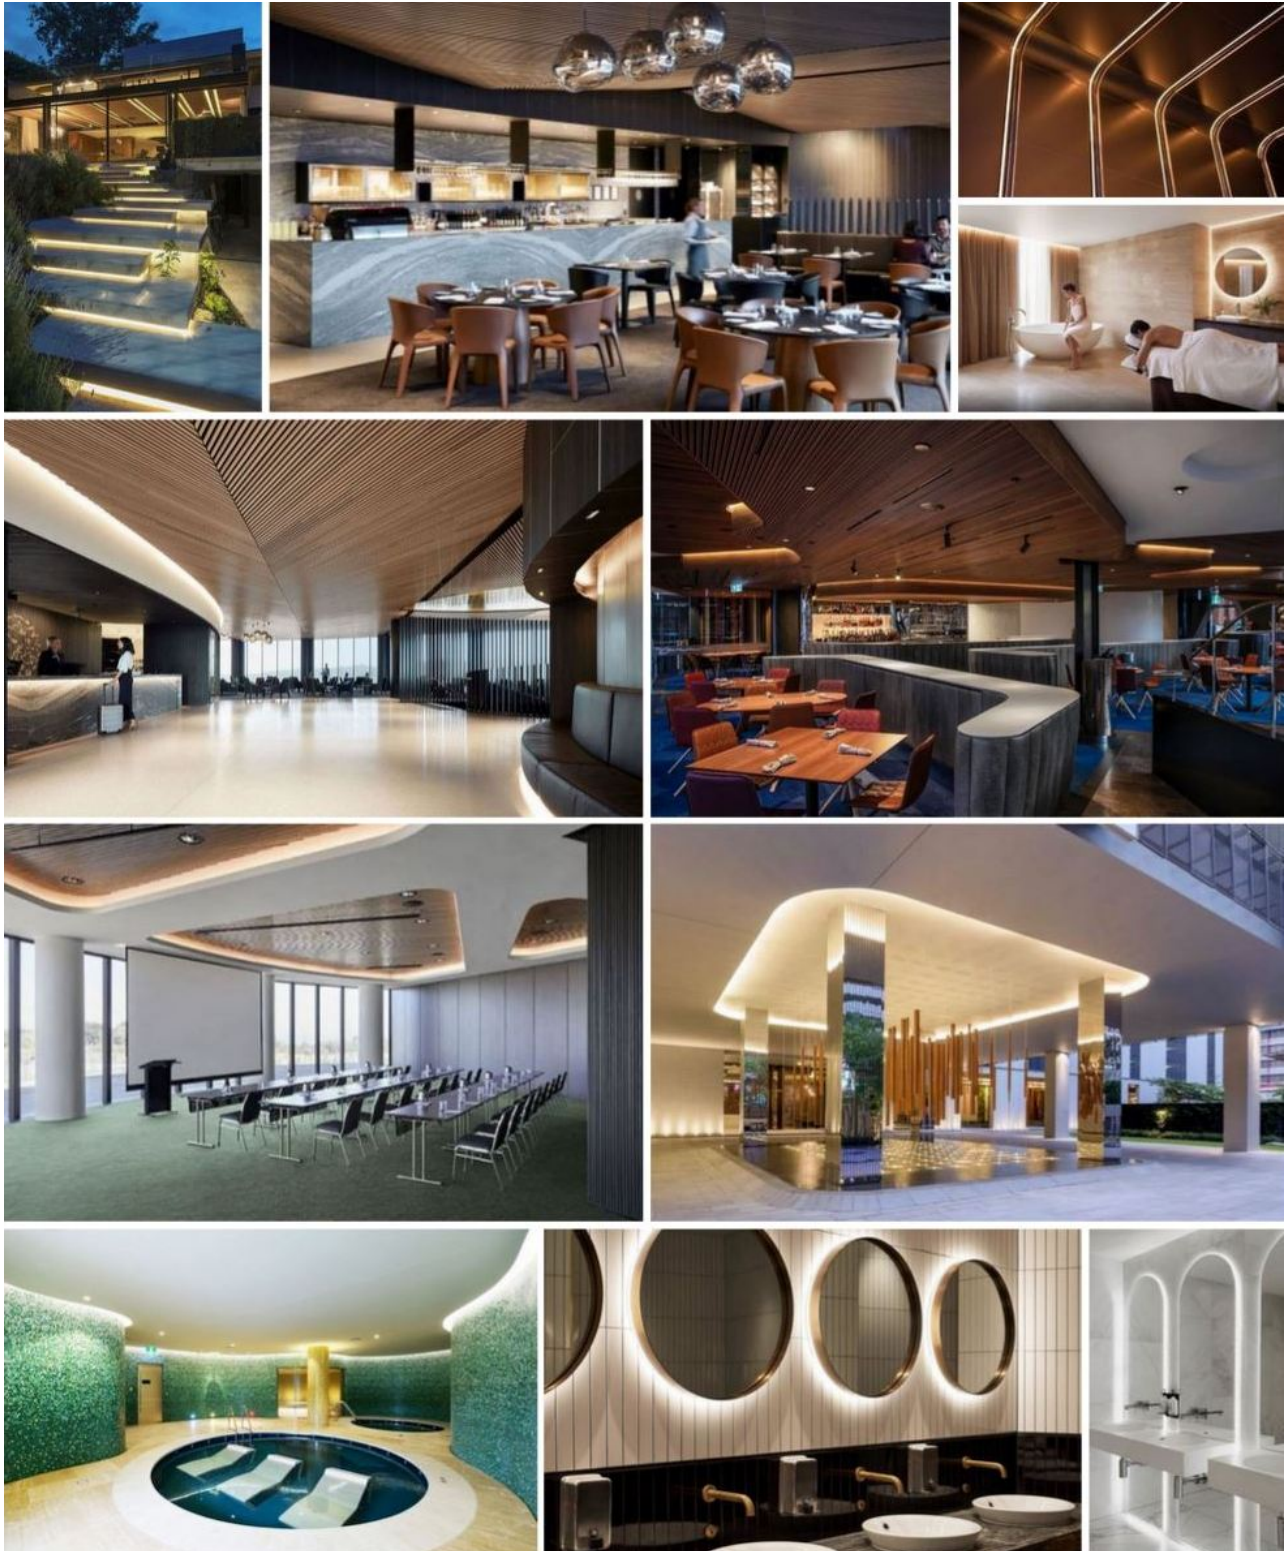

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes