

SUPER NEON TOP

IP68 SILICONE FLEXIBLE LED NEON FLEX
HORIZONTAL BEND



description

Features

- IP68 Silicone Flexible LED Neon Flex
- Submersible Rated IP68
- For Interior & Exterior Applications
- Viewing angle: 270°
- 1 Side Illumination
- Continuous Length up to 10 metres by powering one end
- Minimum Bending diameter: 60mm
- Cuttable increments: 50mm White
- Cuttable increments: 83.3mm RGBW

Colour Temperature

- 2700K – V Warm White
- 3000K – Warm White
- 4000K – Neutral White
- RGBW – Red, Green, Blue, 3000K

Installation

- CLIP - Clear Clips
- TRU - Aluminium U-channel

Voltage

- 24VDC



technical information

Lamp Module			
LED Type	2835	2835	5050
Wattage / Metre	12 watts	15 watts	13.8 watts
Colour Temp	3000K	3000K	RGBW
Luminous Flux**	500 lm	600 lm	N/A
IP Rating	IP68	IP68	IP68

** Measure of the useful power emitted by a light source (amount of light produced out of the fixture).


ordering information

FITTING	COLOUR TEMP	CABLE OPTIONS	DIMMING
TOP-12	27K V Warm White (2700K)	END End Feed	ND Non Dimmable
TOP-15	30K Warm White (3000K)	BTM Bottom Feed	DIM 1-10V Dimmable
	40K Neutral White (4000K)	SIDEA Side Feed	DMX Dmx Dimmable
	RGBW Red, Green, Blue & 3000K	SIDEB Side Feed	DALI Dali Dimmable

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes


SUPER NEON TOP

IP68 SILICONE FLEXIBLE LED NEON FLEX
HORIZONTAL BEND





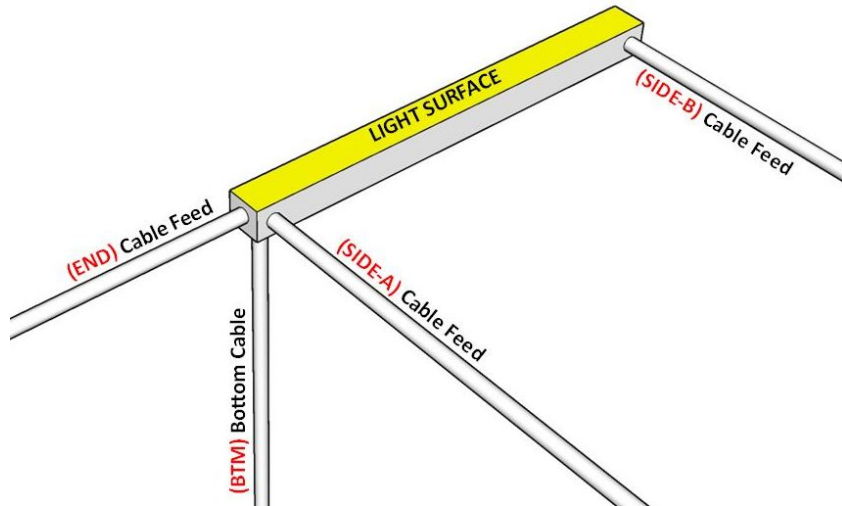


Cable Feed Options

- END End Cable Feed
- BTM Bottom Cable Feed
- SIDE A Side A Cable Feed
- SIDE B Side B Cable Feed

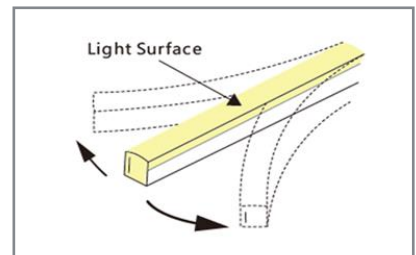


Mounting Accessories

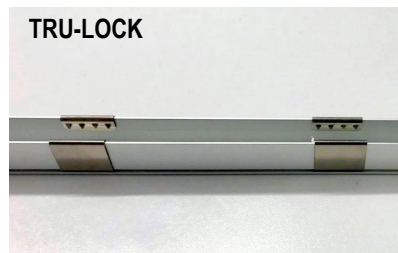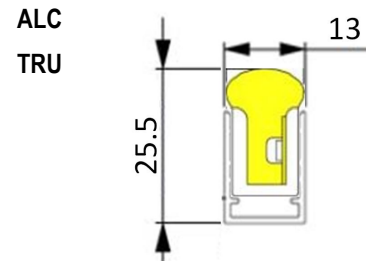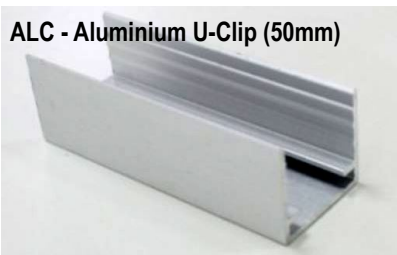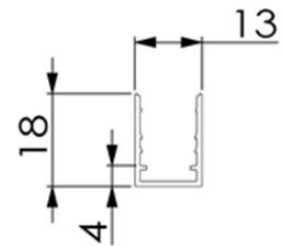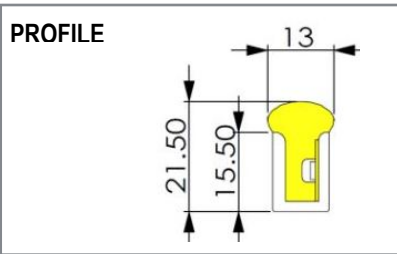

- ALC-LK AL. Locking U-Clip
- TRU-LK AL. Locking U-Channel
(13mm W x 18mm H)

APPLICATIONS

VUELITE - SILICONE NEON FLEX

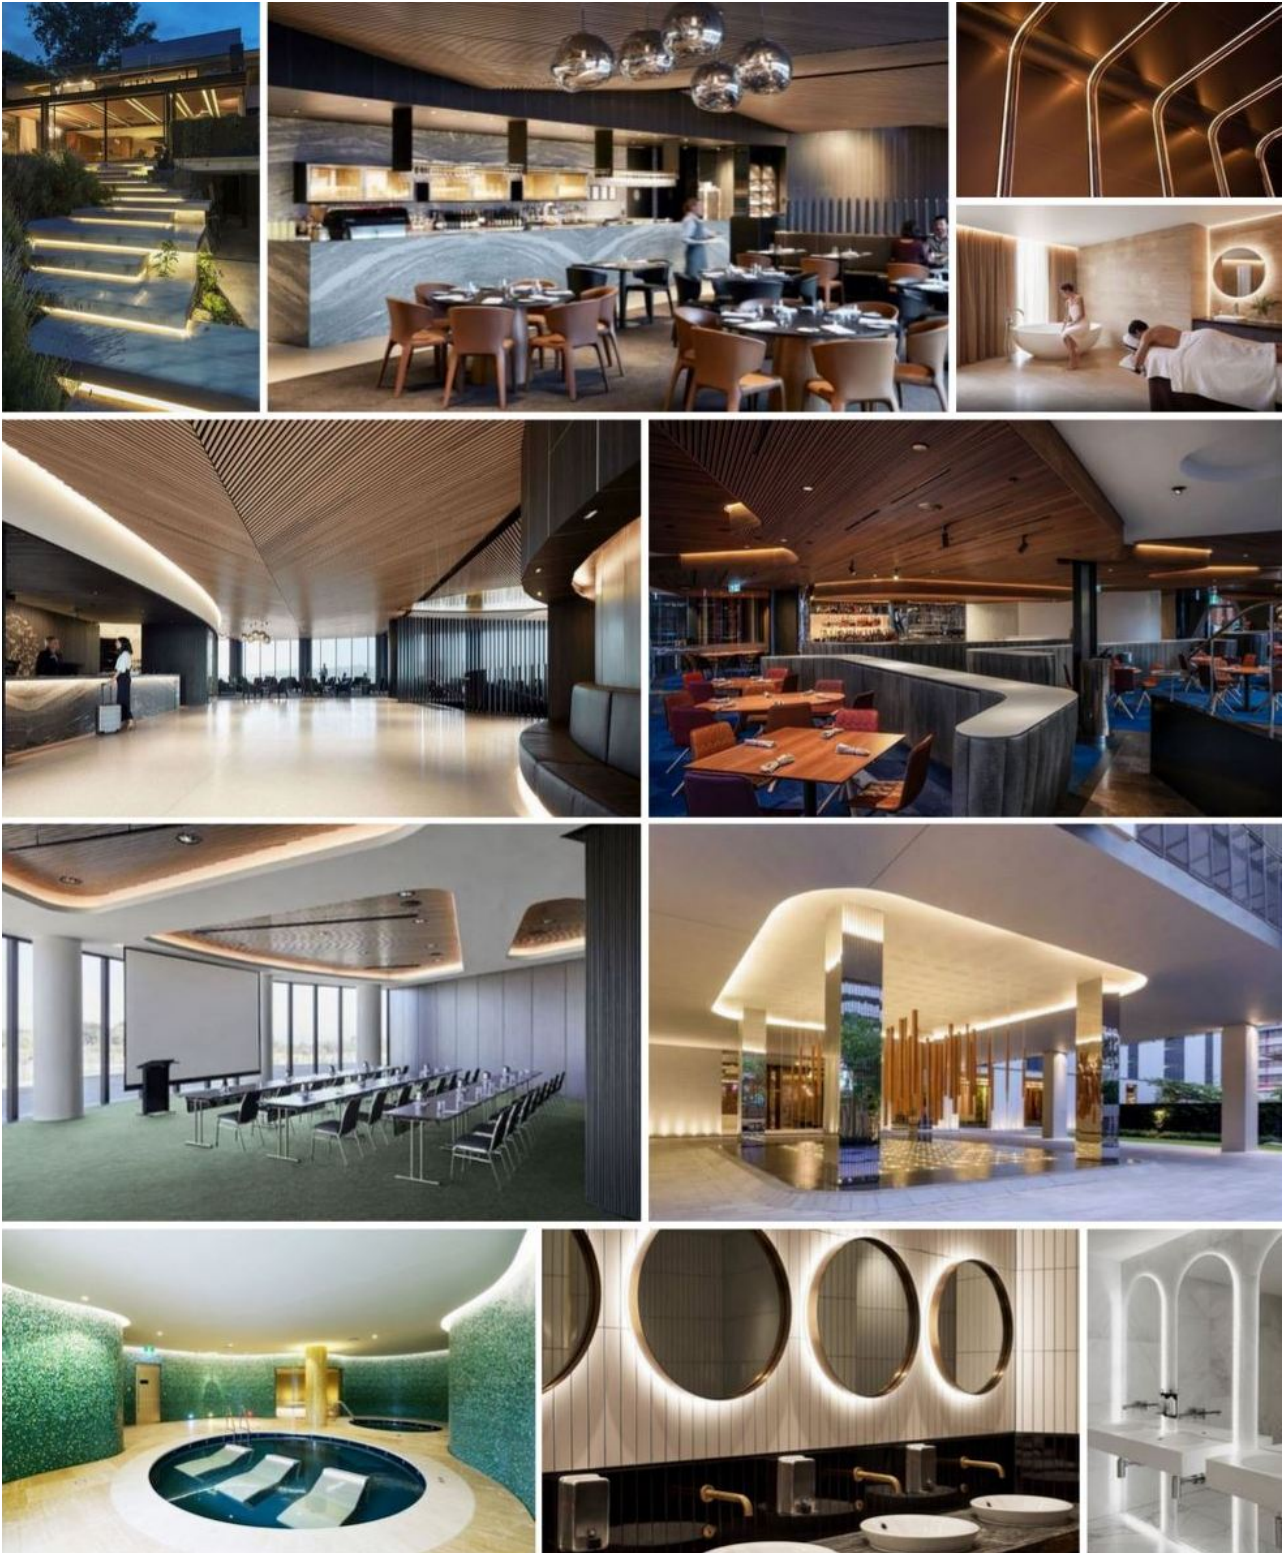

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes