


NEON-TWIST

IP67/ IP68 SILICONE FLEXIBLE LED NEON FLEX
VERTICAL & HORIZONTAL BEND

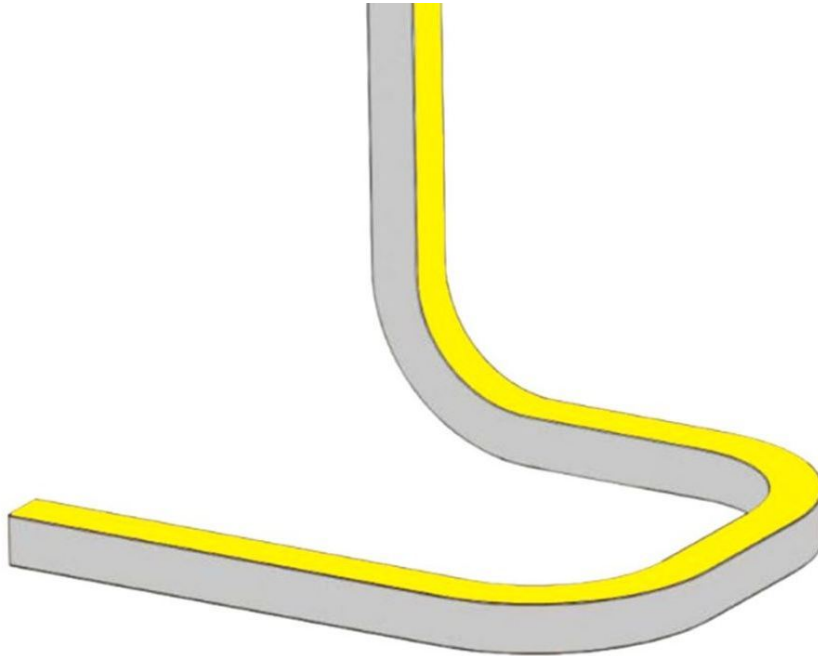

description

Features

- IP67/ IP68 Silicone Flexible LED Neon Flex
- Submersible Rated IP68
- For Interior & Exterior Applications
- **1 Side Illumination - Viewing angle: 110°**
- Continuous Length up to 10 metres by powering one end
- Minimum Bending diameter: 100mm
- Cuttable increments: 33.3mm

Colour Temperature


- 2700K – V Warm White
- 3000K – Warm White
- 4000K – Neutral White
- RGBW – Red, Green, Blue, 3000K

Installation

- CLIP - clear clips
- TRU - Aluminium U-channel

Voltage

- 24VDC

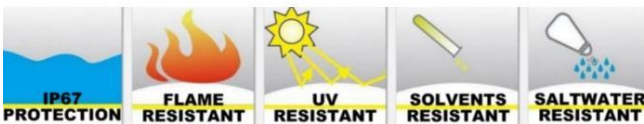

technical information

	NEON-TWIST-12	NEON-TWIST-15
Wattage / Metre	12 watts	15 watts
Colour Temp	3000K	3000K
Luminous Flux**	650lm	800lm
IP Rating	IP67/ IP68	IP67/ IP68

** Measure of the useful power emitted by a light source (amount of light produced out of the fixture).



ordering information

FITTING	COLOUR TEMP	CABLE OPTIONS	DIMMING
NEON-TWIST-12	27K V Warm White (2700K)	END End Feed	ND Non Dimmable
NEON-TWIST-15	30K Warm White (3000K)	BTM Bottom Feed	DIM 1-10V Dimmable
	40K Neutral White (4000K)	SIDEA Side Feed	DMX Dmx Dimmable
	RGBW Red, Green, Blue, White	SIDEB Side Feed	DALI Dali Dimmable

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes


NEON-110

IP68 SILICONE FLEXIBLE LED NEON FLEX
 VERTICAL BEND (1 SIDE ILLUMINATION - 110° ANGLE)

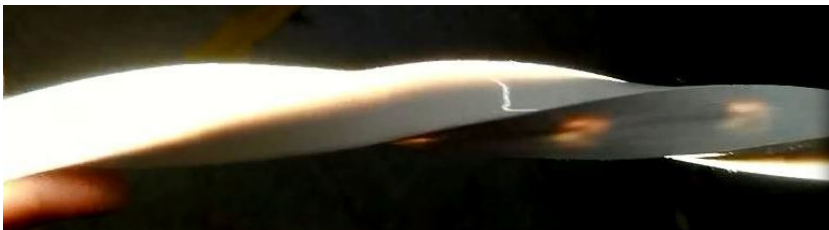
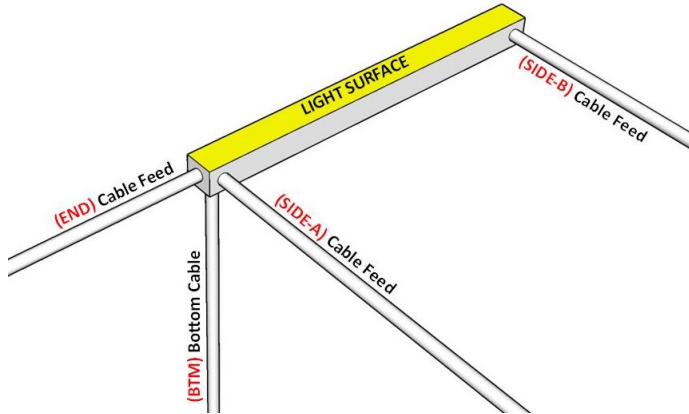


Cable Feed Options




- END** End Cable Feed
- BTM** Bottom Cable Feed
- SIDE A** Side A Cable Feed
- SIDE B** Side B Cable Feed



Mounting Accessories

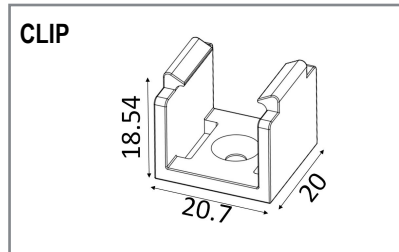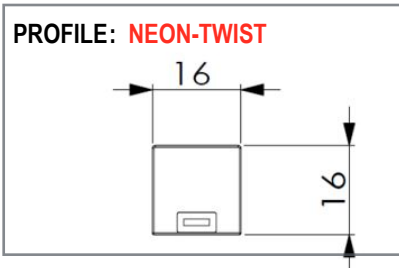


- CLIP** Clear Clip
(20.7mm W x 18.54mm H)

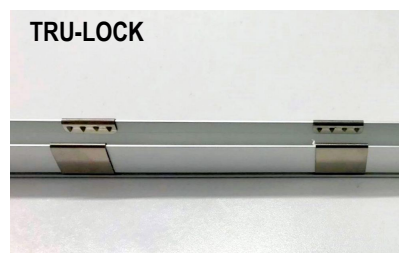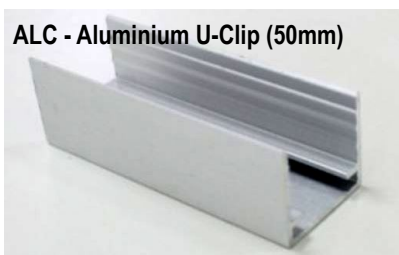

APPLICATIONS

VUELITE - SILICONE NEON FLEX

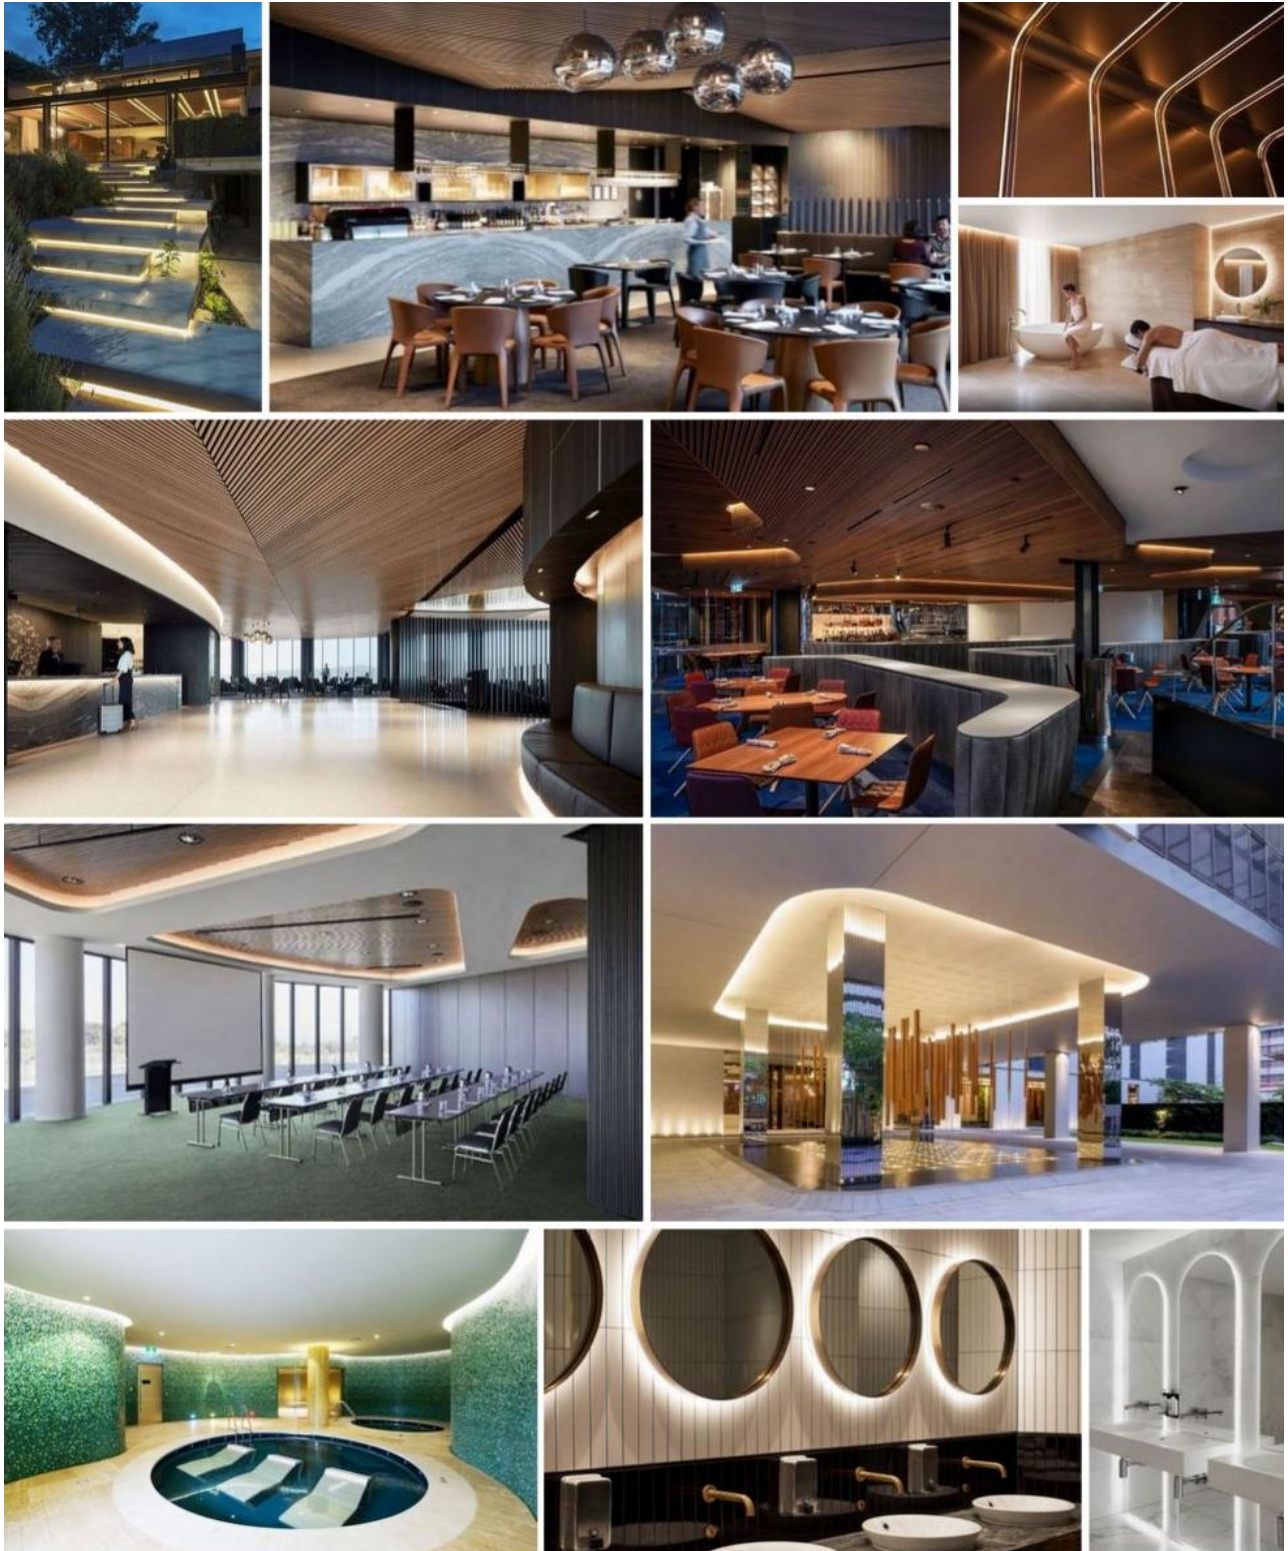

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes