


SUPER NEON MINI

IP67 SILICONE FLEXIBLE LED NEON FLEX
HORIZONTAL BEND

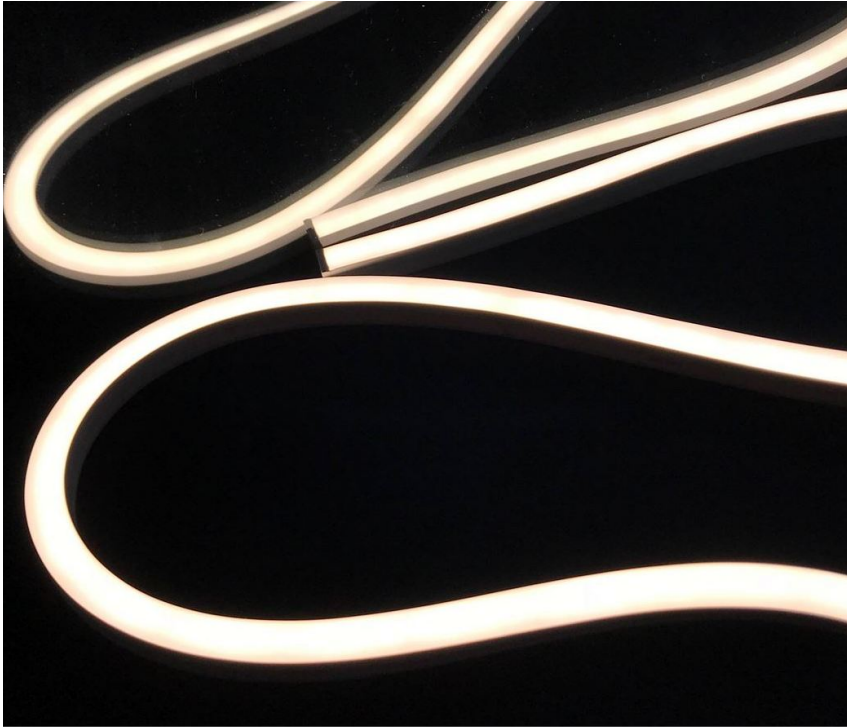

description

Features

- IP67 Silicone Flexible LED Neon Flex
- For Interior & Exterior Applications
- Viewing angle: 140°
- 1 Side Illumination
- Continuous Length up to 10 metres by powering one end
- Minimum Bending diameter: 30mm
- Cuttable increments: 50mm

Colour Temperature

- 2700K – V Warm White
- 3000K – Warm White
- 4000K – Neutral White

Installation

- ALC - Aluminium U-Clip (50mm)
- TRU - Aluminium U-channel

Voltage

- 24VDC



technical information

Lamp Module	
LED Type	2835
Wattage / Metre	12 watts
Colour Temp	3000K
Luminous Flux**	400 lm
IP Rating	IP67

** Measure of the useful power emitted by a light source (amount of light produced out of the fixture).


ordering information

FITTING	COLOUR TEMP		CABLE OPTIONS		DIMMING	
SN-MINI	27K	V Warm White (2700K)	END	End Feed	ND	Non Dimmable
	30K	Warm White (3000K)	BTM	Bottom Feed	DIM	1-10V Dimmable
	40K	Neutral White (4000K)	SIDEA	Side Feed	DMX	Dmx Dimmable
			SIDEB	Side Feed	DALI	Dali Dimmable

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes


SUPER NEON MINI

IP67 SILICONE FLEXIBLE LED NEON FLEX
HORIZONTAL BEND

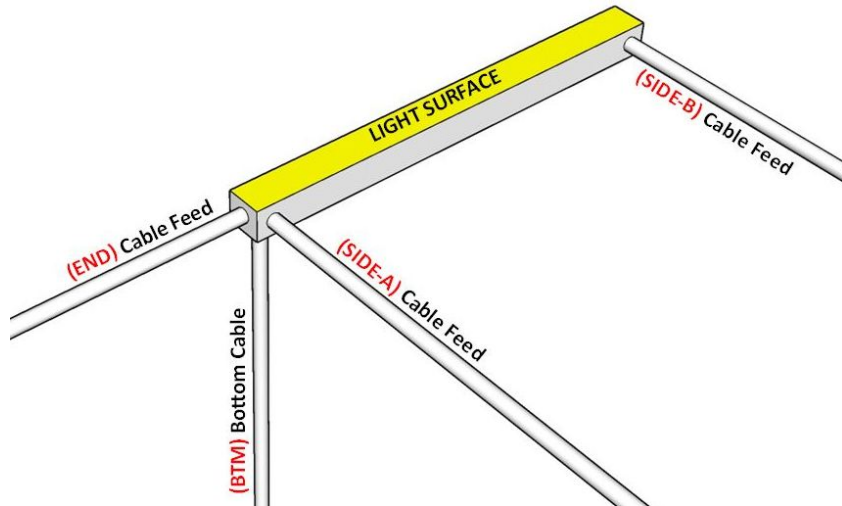




Cable Feed Options

- END** End Cable Feed
- BTM** Bottom Cable Feed
- SIDE A** Side A Cable Feed
- SIDE B** Side B Cable Feed

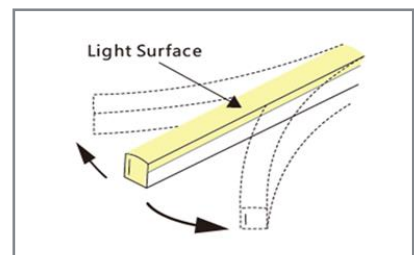

Mounting Accessories

PROFILE

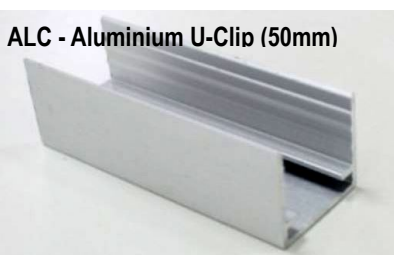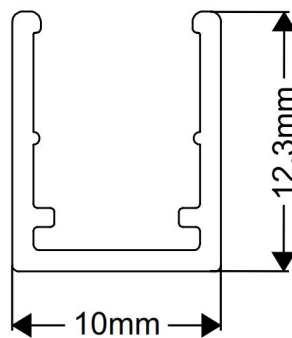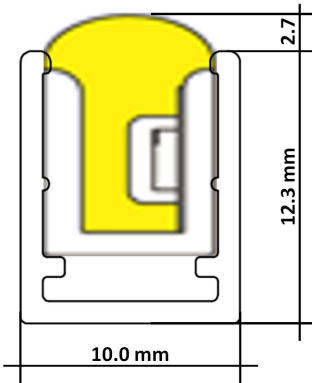

ALC - Aluminium U-Clip (50mm)




TRU - Aluminium U-Channel

- ALC** Aluminium U-Clip (50mm)
- TRU** Aluminium U-Channel

APPLICATIONS

VUELITE - SILICONE NEON FLEX

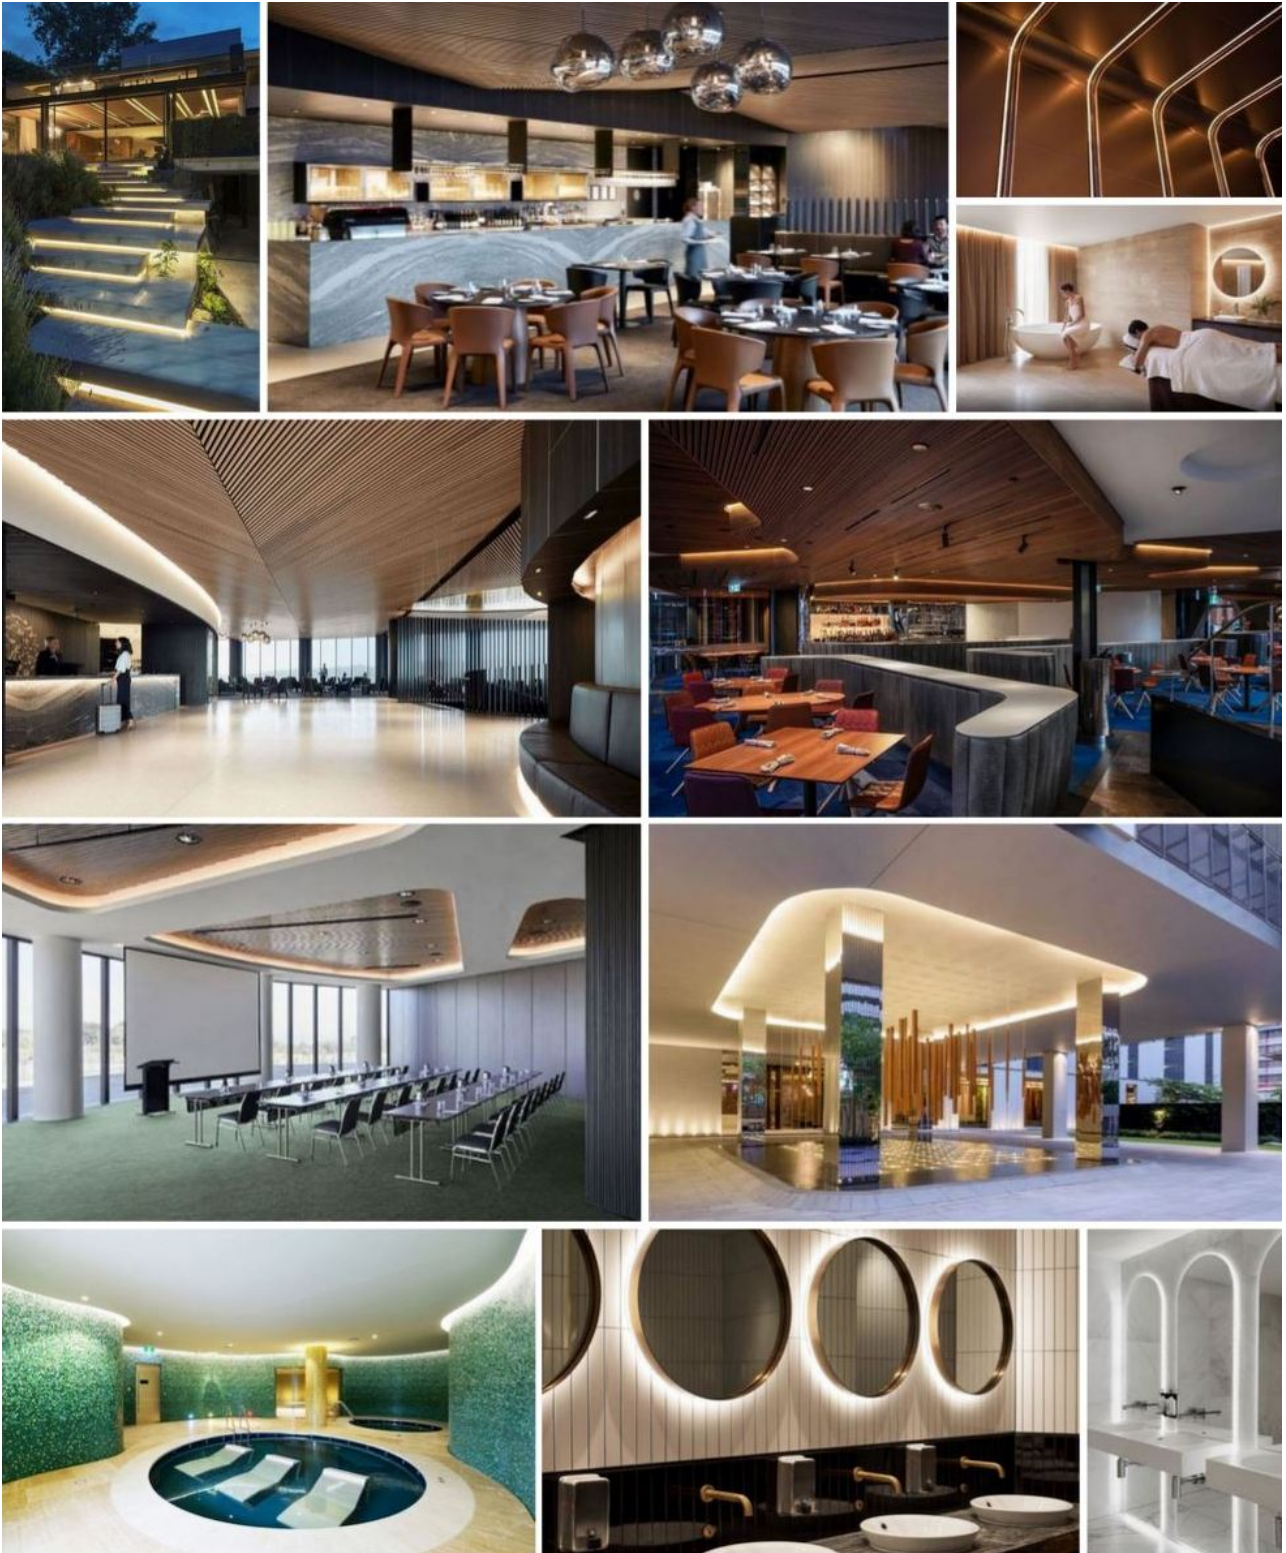

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes