


Discera 400

SX 924 13-9



bracket mounted luminaire
asymmetric street,
LED, 4200 lm, 3000 K, CRI > 70, electronic converter,
Total power: 40 W

bracket mounted luminaire, can be combined with a
variety of arms, for assembly on recommended poles,
for bracket spigot Ø 42mm, luminaire housing made of
die-cast aluminium, aluminium, screws made of
stainless steel, thread with insert sleeves made of
stainless steel, shielding made of safety glass
antireflective coated,
Optical system: reflector optics
incl. 8m feed cable, easy, tool less maintenance access
via single-hand toggle lever,

CE, IK09, IP65, Protection Class II, optional I

colour: Selux Graphite or special finish

Height H: 106 mm
Diameter Ø: 400 mm
Weight: 10 kg
Windpressure: 0,04 m²

Make: Selux, Type: SX 924 13-9



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Discera 400

SX 924 13-9

Technics

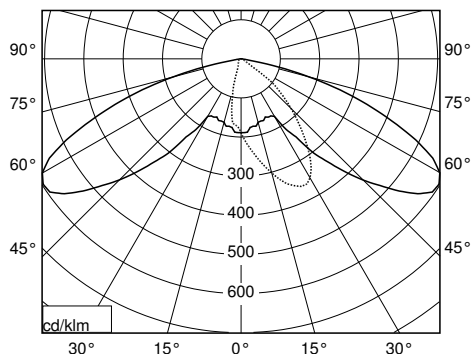

Upper Light Output Ratio (ULR): 0 %

Photometric data: 8331

Lamp

LED · 4200lm · Light colour: 3000 K · CRI > 70.

Optic

reflector optics · asymm. street.

Electrics

electronic converter · Total power: 40W · 8m feed cable

control options:

HNS · 1-10V · individual power reduction in 300 lumen steps ex work

Luminous flux characteristics / Operating time

	20000	35000	50000	65000
Operating time				
Lumen maintenance	92%	89%	84%	80%
LLMF*	0.92	0.89	0.84	0.8

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com