

Olivio Medio

SX 961 11-9




luminaire head, rotation symmetrical 40° (± 20°), medium beam
LED , 2925 lm, 3000 K, CRI: > 80, electronic converter, Total power: 41 W

luminaire head to be mounted on Olivio Candelabra, Sistema or Floracion poles and brackets,, luminaire housing made of die-cast aluminium, painted, aluminium, screws made of stainless steel, adjustable head joint ensures precise direction of luminaire head, wide pivoting range from 20° to 195°, can be rotated + / - 180°, shielding made of safety glass
Optical system: medium reflector
hidden cable entry through the head joint, incl. 10m feed cable, easy maintenance access via lockbar mechanism,

CE, ENEC 05, IK06, IP67, Protection Class II, optional I

colour: Selux Graphite or special finish

Height h: 260 mm
Diameter: 163 mm
Outreach: 260 mm
Weight: 6 kg
wind pressure: 0.05 m2

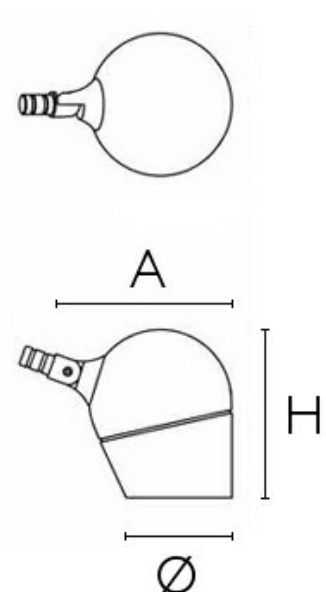

Make: Selux, Type: SX 961 11-9



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Olivio Medio

SX 961 11-9

Technics

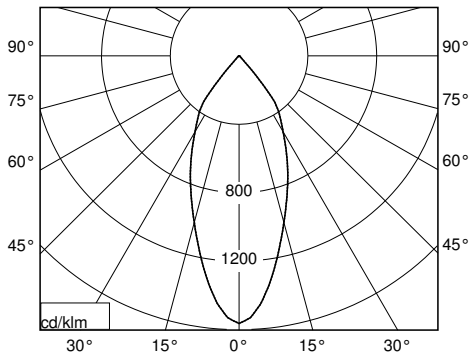

Photometric data: 8480

Lamp

LED, 2925 lm, 3000 K, CRI: > 80

Optic

medium reflector, medium beam

Electrics

electronic converter

Total power: 41 W

incl. 10m feed cable

control options:

dynamic, DALI, fix value, individual power

reduction in 300 lumen steps ex work

Luminous flux characteristics / Operating time

Operating time	18000	36000	54000	72000	88000
Lumen maintenance	95%	86%	80%	75%	70%
LLMF*	0.95	0.86	0.8	0.75	0.7

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com