

## Olivio Piccolo

SX 962 11-9



luminaire head, rotation symmetrical 40° (± 20°), medium beam, LED, 1650 lm, 3000 K, CRI: > 80, electronic converter, Total power: 24 W

luminaire head to be mounted on wall brackets,, luminaire housing made of die-cast aluminium, painted, aluminium, screws made of stainless steel, adjustable head joint ensures precise direction of luminaire head, wide pivoting range from 20° to 195°, can be rotated + / - 180°, shielding made of safety glass, medium reflector, hidden cable entry through the head joint, incl. 8m feed cable, easy maintenance access via lockbar mechanism

CE, ENEC 05, IK06, IP67, Protection Class II, optional I

colour: Selux Graphite or special finish

Height h: 188 mm  
Diameter: 150 mm  
Outreach: 285 mm  
Weight: 2 kg  
wind pressure: 0.024 m2



Make: Selux, Type: SX 962 11-9



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, [info@selux.com](mailto:info@selux.com), [www.selux.com](http://www.selux.com)

# Olivio Piccolo

SX 962 11-9

## Technics

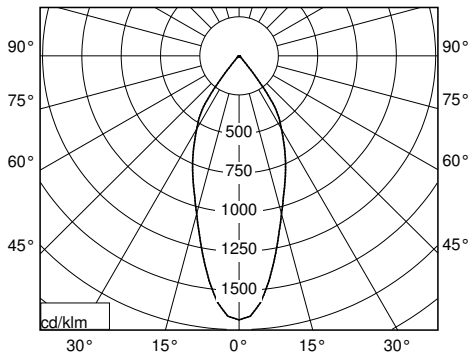

Photometric data: 8474

### Lamp

LED, 1650 lm, 3000 K, CRI: > 80

### Optic

medium reflector, medium beam

### Electrics

electronic converter

Total power: 24 W

incl. 8m feed cable,

control options:

, DALI, fix value, individual power reduction

in 300 lumen steps ex work

## Luminous flux characteristics / Operating time

	23000	46000	69000	92000	115000
Operating time					
Lumen maintenance	93%	86%	81%	75%	70%
LLMF*	0.93	0.86	0.81	0.75	0.7

\* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.

© Selux AG, Subject to technical modification 03.2015

Selux AG, Motzener Straße 34, D-12277 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com