



## Sombreo 230

SX 7-559733-700



bracket mounted fixture  
asymmetric  
LED 3000 lm, 3000 K, CRI > 80, electronic converter,  
connected load: 45W

bracket mounted luminaire, pole ordered separately,  
housing made of aluminium cast, stainless steel, screws  
stainless steel, stainless steel threaded inserts for regularly  
used fixing positions, tool-free, easy maintenance access  
via snap-closures  
clear acrylic body (PMMA) with satin finish base plate and  
SEPOLAR® Comfort tube  
Optical system: LED reflector unit

CE, IP65, Protection class II

Manufacturer: Selux, type: SX 7-559733-700 [colour: Selux  
graphite or choice of colours]

Diameter Ø: 460mm  
Height H: 435mm  
Weight: 7,0 kg  
Windage area: 0,1460 m<sup>2</sup>

### colour

Selux graphite or choice SX 7-559733-700  
of colours



IP65



Modifications are possible due to the constant development and improvement of LED technology.


© Selux AG, Subject to technical modification 09.2015

Selux AG, - Lichttechnische Werke -, Motzener Straße 34, D-12277 Berlin, T +49 (30) 72001-0, Fax: +49 (30) 72001-100, www.selux.com

## Sombreo 230

SX 7-559733-700

### Lighting specification

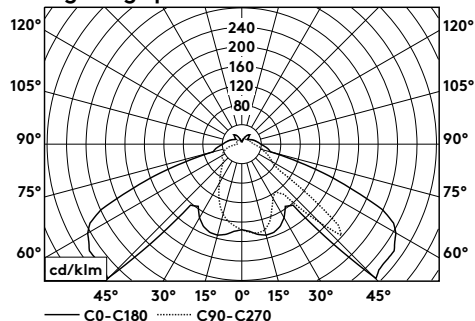

Upward light ratio (ULR): 12%  
 photometric data: 9935

### lamp

LED 3000 lm, 3000 K, CRI > 80

### Optical system

LED reflector unit  
 asymmetric

### Electrical specification

electronic converter  
 connected load: 45 W

### Recommended poles

Height H	SpigotØ	LPH	type
5930 / 1000mm	76mm	4800mm	SX 090 30-
7500 / 1200mm	76mm	6000mm	SX 090 40-
7500 / 1200mm	76mm	6000mm	SX 090 60-