






# AWA-LED

RECESSED LED DOWNLIGHT  
Round Adjustable Wide Aperture



CUT OUT

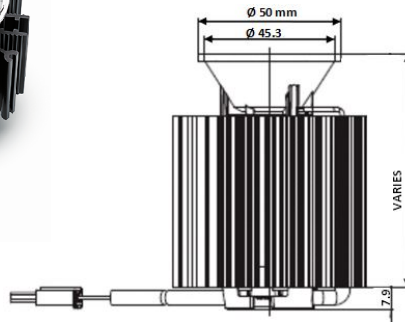

## description

### Aiming

360° swivel; 80° tilt, with 25°, 34° and 48° optic options.

### Colour Temperature Options

- 2700K - V Warm White
- 3000K - Warm White
- 4000K - Neutral White

### Special Features

Deep recessed LED position for glare control

### Effects Devices

Designed to accept 2 additional effects devices

### Trim plate

Plaster ceiling installation with proud trim

### Retention

Spring clips accommodate varying ceiling thicknesses and ensure snug fit against ceiling.

## technical information

lamp module	VS active line luga	
Wattage / Metre	10.2 watt	12 watts
Colour Temp	3000K	3000K
Luminous Flux**	1050 lm (initial LED lumens)	1450 lm (initial LED lumens)
Efficacy	108 lm/w	125 lm/w
Colour Rendering	85 CRI	85 CRI

\*\* Measure of the useful power emitted by a light source (amount of light produced out of the fixture).

## ordering information

FITTING	WATTAGE	COLOUR TEMP	OPTICS	FINISH COLOUR
<b>AWA-LED</b>	10 (Watts) 12 (Watts)	27K V Warm White (2700K) 3K Warm White (3000K) 4K Neutral White (4000K)	25D 25 Degree 34D 34 Degree 48D 48 Degree	WH Matte White BK Matte Black SS Stainless ** IP44 rated also available