

LD-SERIES

IP20 LINEAR RECESSED MULTI-DOWNLIGHT
TRIM / TRIMLESS



description

Special Features

- Aluminium Die-Casting
- Available in Small, Medium, Large
- Beam Angle 15°, 35°, 45°, wall wash

Colour Temperature Options


- 3000K - Warm White
- 4000K - Neutral White

Power Supply

- Remote Driver
- Dimmable (Mains, DALI)

Options

- Trim / Trimless
- 90 CRI upon request

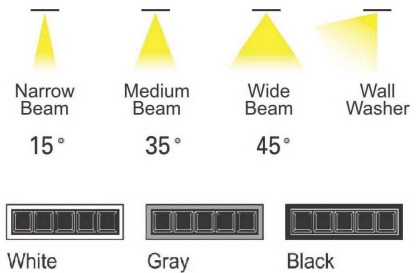

technical information

| lamp module | LD-S | LD-M | LD-L |
|------------------|---------|---------|---------|
| Wattage | 13 watt | 24 watt | 36 watt |
| Colour Temp | 3000K | 3000K | 3000K |
| Luminous Flux** | 850 lm | 1590lm | 2450 lm |
| Colour Rendering | 80 CRI | 80 CRI | 80 CRI |

** Measure of the useful power emitted by a light source (amount of light produced out of the fixture).

ordering information

| FITTING | TRIM | COLOUR TEMP | OPTIC | COLOUR | DIMMING |
|---------|-------------|--------------------------|---------------|----------|--------------|
| LD-S | TM Trim | 3K Warm White (3000K) | 15D 15° Optic | WH White | ND Non-Dim |
| LD-M | TS Trimless | 4K Neutral White (4000K) | 35D 35° Optic | BK Black | PC Mains Dim |
| LD-L | | | 45D 45° Optic | GR Gray | DALI |
| | | | WW Wall Wash | | |



Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes

LD-SERIES


IP20 LINEAR RECESSED MULTI-DOWNLIGHT
TRIM / TRIMLESS




LD-S-TM
Trim

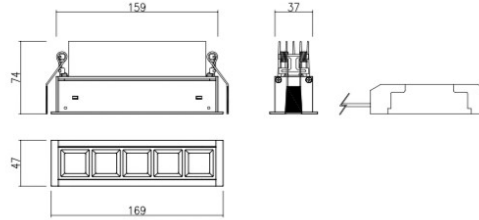


LD-M-TM
Trim

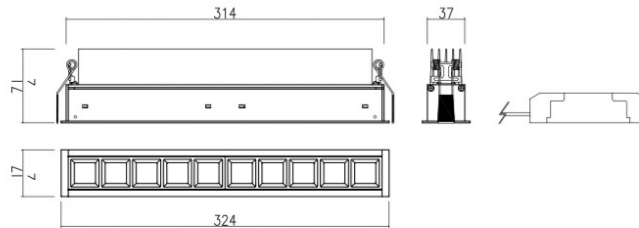


LD-L-TM
Trim

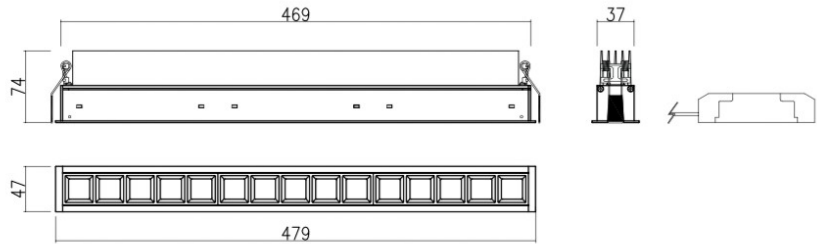

LD-S-TS
Trimless

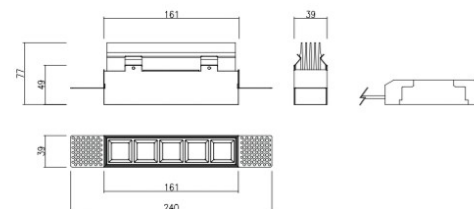

LD-M-TS
Trimless

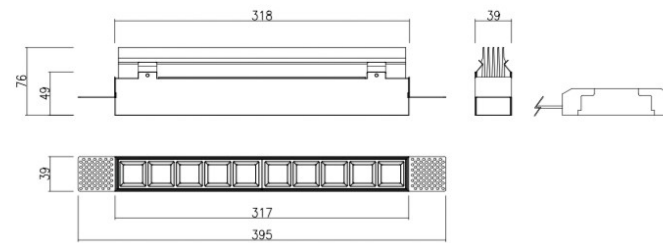

LD-L-TS
Trimless

