

# PIPE

IP20 DIRECT LED DOWNLIGHT  
SURFACE / PENDANT MOUNT



## description

### Special Features

- Aluminium Die-Casting
- Available in Surface or Pendant Mount
- Beam Angle 15°, 26°, 40° Optic
- Ø60mm x 250mm
- Colours: White/ Black/ Gray, with internal Gold finish.

### Colour Temperature Options

- 3000K - Warm White
- 4000K - Neutral White

### Power Supply

- Integral Drivers
- Dimmable (1-10V, DALI)

### Options

- Surface Mount
- Pendant Mount

## technical information

lamp module	
Wattage	14 watt
Colour Temp	3000K
Luminous Flux**	1335 lm
Maintenance of Lumens -L80	50,000 hrs @ 25 deg
Colour Rendering	80 CRI

\*\* Measure of the useful power emitted by a light source (amount of light produced out of the fixture).

## ordering information

FITTING	OPTIC	COLOUR TEMP	DIMING	FINISH COLOUR
<b>PIPE-S</b>	<b>15D</b> 15° Optic	<b>3K</b> Warm White (3000K)	<b>ND</b> Non-Dim	<b>WH</b> White
<b>PIPE-P</b>	<b>26D</b> 26° Optic	<b>4K</b> Neutral White (4000K)	<b>PC</b> Phase Dim	<b>BK</b> Black
	<b>40D</b> 40° Optic		<b>1-10V</b> <b>DALI</b>	<b>GR</b> Gray

Specifications and Dimensions subject to change without notice  
Consult your representative for additional options and finishes


# PIPE

IP20 DIRECT LED DOWNLIGHT  
SURFACE / PENDANT MOUNT




## Optics


### Narrow Beam (15.7°)

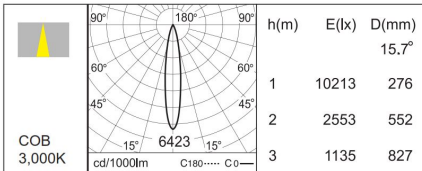

### Medium Beam (26.7°)

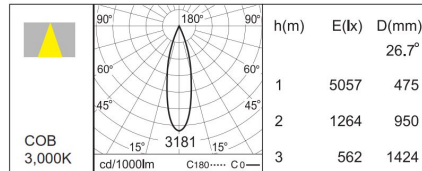


### Wide Beam (40°)

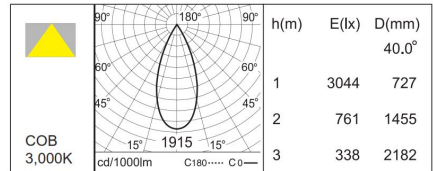

## Dimensions

### PIPE-S (SURFACE MOUNT)



### PIPE-P (PENDANT MOUNT)

