

MOONSHINE

IP20 ROUND DIRECT **SURFACE MOUNT** /
IP20 ROUND DIRECT **PENDANT MOUNT**



technical information

Type	MS-*-500	MS-*-600	MS-*-750	MS-*-850
Wattage	46 watt	65 watt	80 watt	90 watt
Colour Temp	3000K	3000K	3000K	3000K
Luminous Flux**	4890 lm	4950 lm	6567 lm	7200 lm
Colour Rendering	80	80	80	80
Dimension (diameter)	500 mm	600 mm	750 mm	850 mm

* (S) surface mount / (P) Suspended Pendant

** Measure of the useful power emitted by a light source (amount of light produced out of the fixture).


ordering information

FITTING	SIZE	COLOUR TEMP	DIMMING	FINISH COLOUR
MS-S	500 (500Mmm)	3K Warm White (3000K)	ND Non-Dim	WH White
MS-P	600 (600Mmm)	4K Neutral White (4000K)	DALI DALI Dim	BK Black
	750 (750Mmm)			GR Gray
	850 (850Mmm)			

Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes

MOONSHINE

IP20 ROUND DIRECT **SURFACE MOUNT** /
IP20 ROUND DIRECT **PENDANT MOUNT**

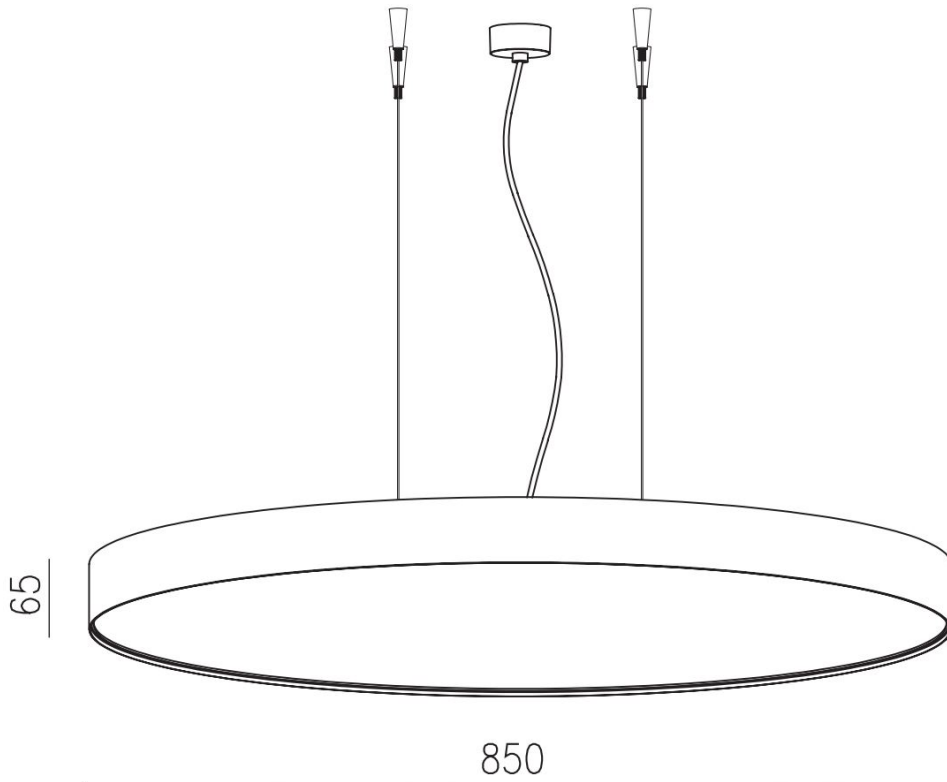

	Ø 500 mm	Ø 600 mm	Ø 750 mm	Ø 850 mm
Pendant Type	 MS-P-500	 MS-P-600	 MS-P-750	 MS-P-850
Surface Mounted Type	 MS-S-500	 MS-S-600	 MS-S-750	 MS-S-850

OPERATING TEMPERATURE RANGE -20°C to +40°C
 MAINTENANCE OF LUMEN L70 50,000 hours at 25°C
 LED HOUSING AL. Extrude, Electrostatic Powder Coating
 COVER PC

MOONSHINE

IP20 ROUND DIRECT **SURFACE MOUNT** /
IP20 ROUND DIRECT **PENDANT MOUNT**



Specifications and Dimensions subject to change without notice
Consult your representative for additional options and finishes