


# NEON-110

IP68 SILICONE FLEXIBLE LED NEON FLEX  
VERTICAL BEND (1 SIDE ILLUMINATION - 110° ANGLE)

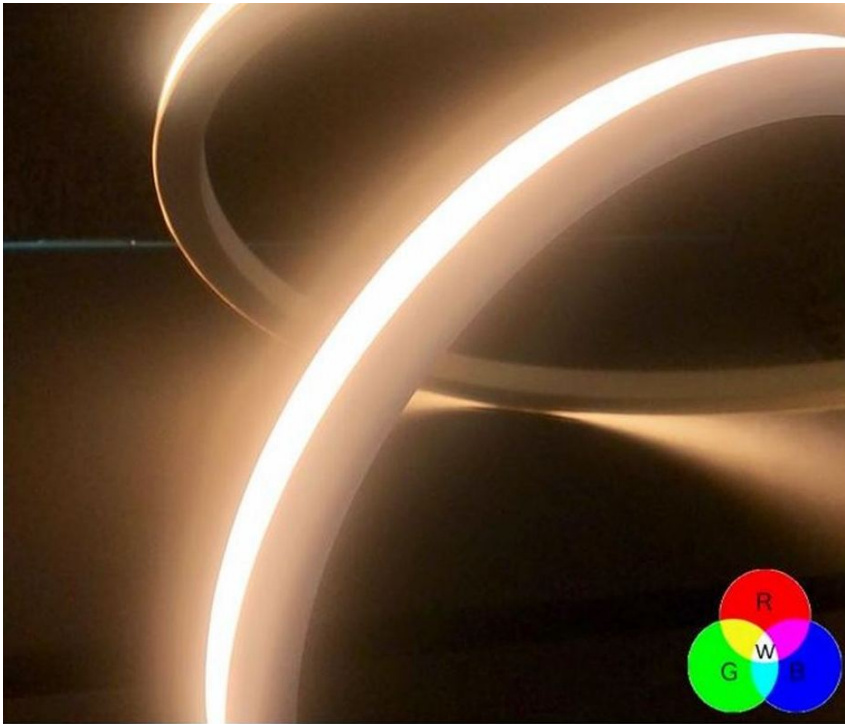

## description

### Features

- IP68 Silicone Flexible LED Neon Flex
- Submersible Rated IP68
- For Interior & Exterior Applications
- **1 Side Illumination - Viewing angle: 110°**
- Continuous Length up to 10 metres by powering one end
- Continuous Length up to 20 metres by powering both ends
- Minimum Bending diameter: 100mm
- Cuttable increments: 50mm White
- Cuttable increments: 71.5mm RGBW

### Colour Temperature

- 2700K – V Warm White
- 3000K – Warm White
- 4000K – Neutral White
- RGBW – Red, Green, Blue, 3000K

### Installation

- CLIP - clear clips
- TRU - Aluminium U-channel

### Voltage

- 24VDC



## technical information

	NEON-110-12	NEON-110-15	NEON-110-RGBW
LED Type	2835	2835	5050
Wattage / Metre	12 watts	15 watts	13.8 watts
Colour Temp	3000K	3000K	RGBW
Luminous Flux**	900lm	1100lm	N/A
IP Rating	IP68	IP68	IP68

\*\* Measure of the useful power emitted by a light source (amount of light produced out of the fixture).


## ordering information

FITTING	COLOUR TEMP	CABLE OPTIONS	DIMMING
<b>NEON-110-12</b>	<b>27K</b> V Warm White (2700K)	<b>END</b> End Feed	<b>ND</b> Non Dimmable
<b>NEON-110-15</b>	<b>30K</b> Warm White (3000K)	<b>BTM</b> Bottom Feed	<b>DIM</b> 1-10V Dimmable
	<b>40K</b> Neutral White (4000K)	<b>SIDEA</b> Side Feed	<b>DMX</b> Dmx Dimmable
	<b>RGBW</b> Red, Green, Blue, White	<b>SIDEB</b> Side Feed	<b>DALI</b> Dali Dimmable

Specifications and Dimensions subject to change without notice  
Consult your representative for additional options and finishes


# NEON-110

IP68 SILICONE FLEXIBLE LED NEON FLEX  
VERTICAL BEND (1 SIDE ILLUMINATION - 110° ANGLE)

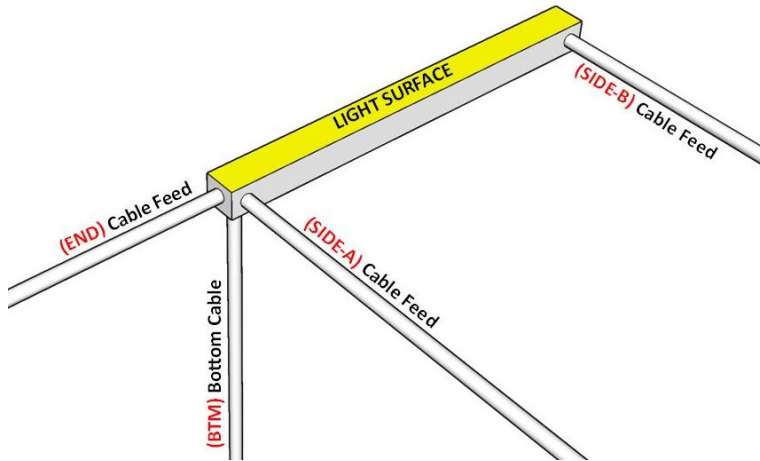

## Cable Feed Options

- END End Cable Feed
- BTM Bottom Cable Feed
- SIDEA Side A Cable Feed
- SIDE B Side B Cable Feed

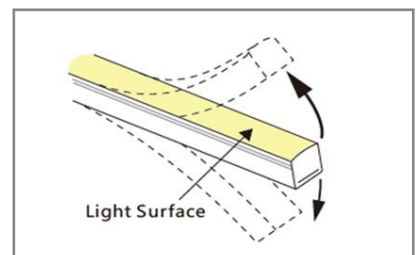




**PROFILE: NEON-110**

- 1 Side Illumination
- Viewing Angle: 110°

**CLIP**

## Mounting Accessories


- CLIP Clear Clip  
(20.7mm W x 18.54mm H)

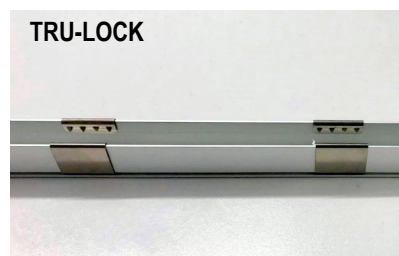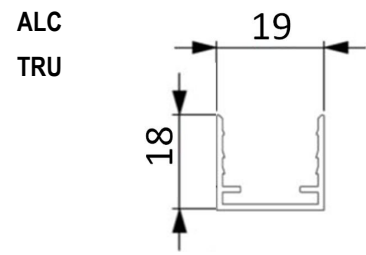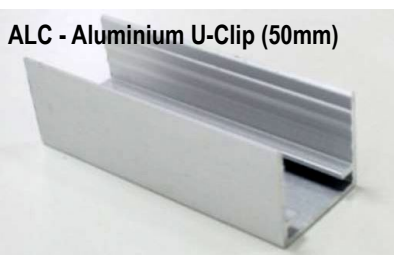

- ALC-LK AL. Locking U-Clip
- TRU-LK AL. Locking U-Channel  
(18mm W x 16mm H)

# APPLICATIONS

VUELITE - SILICONE NEON FLEX

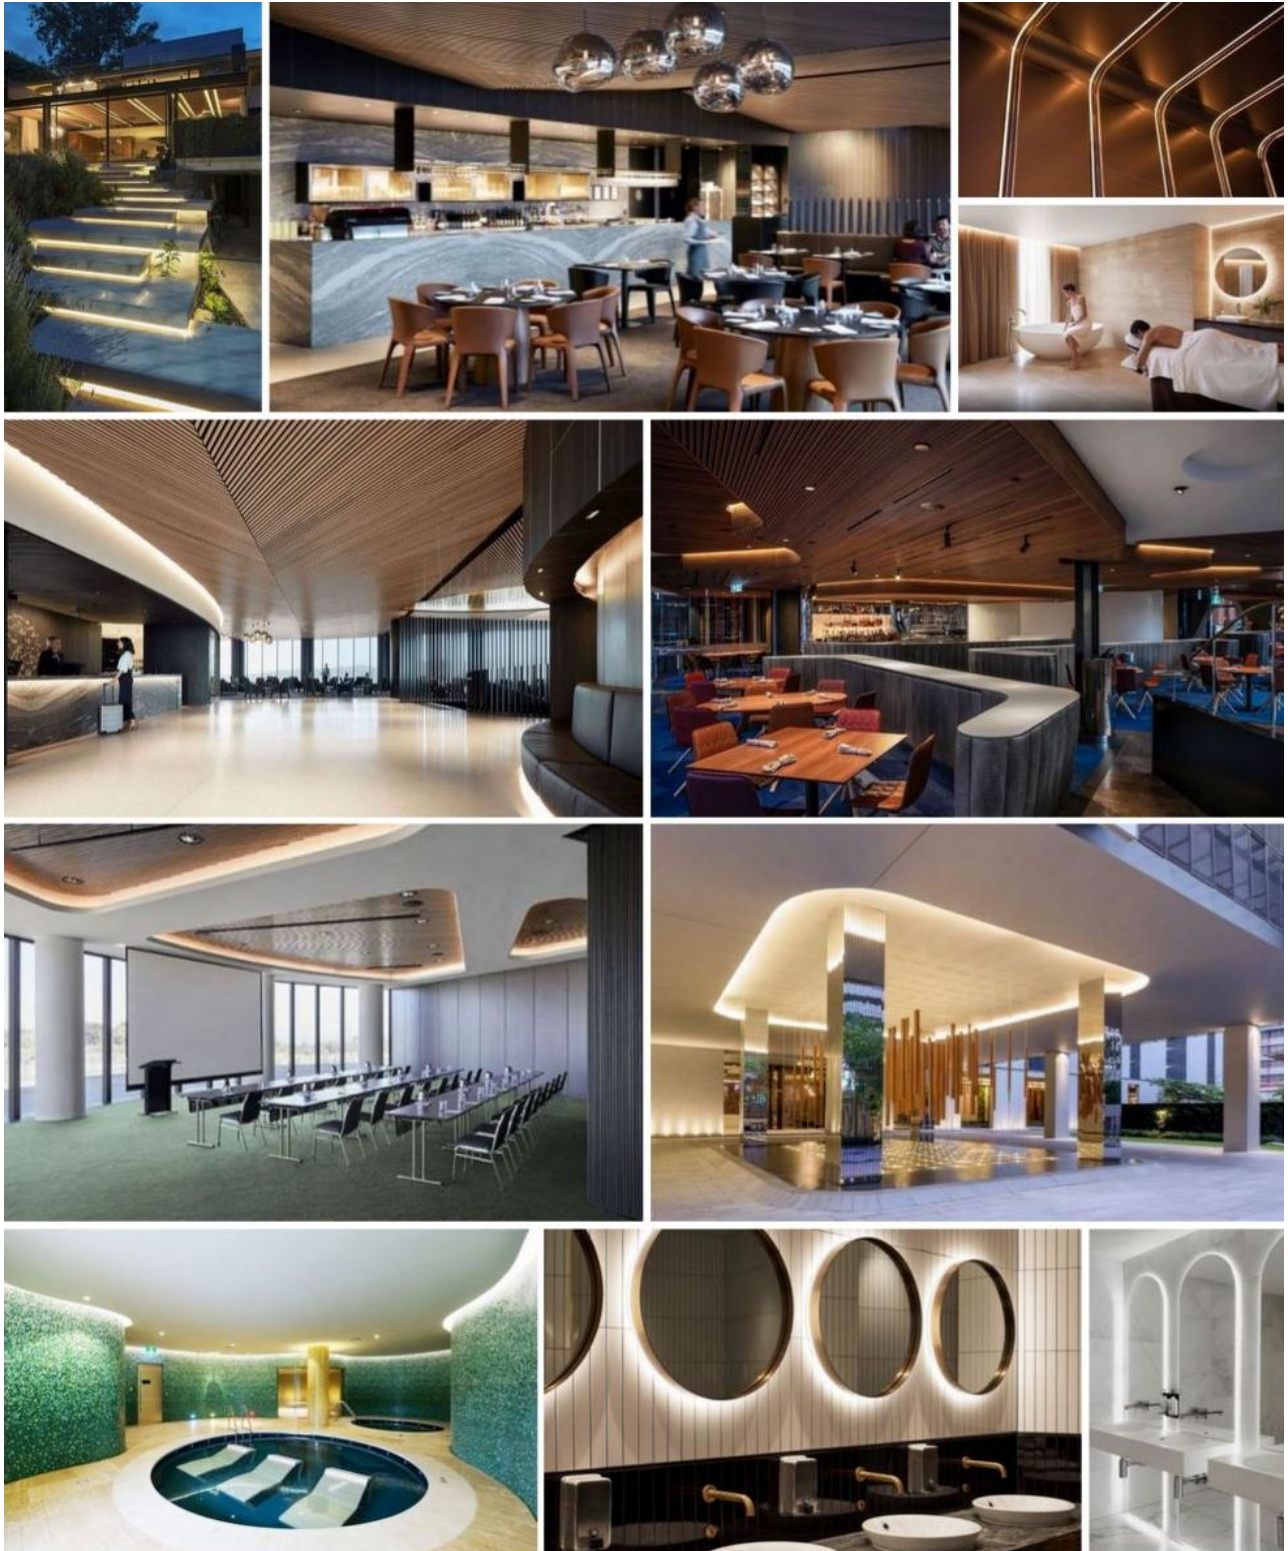

Specifications and Dimensions subject to change without notice  
Consult your representative for additional options and finishes